Glass Door Freezer & Chiller - Plug In

www.createrefrigeration.com









Safety

Stable product performance, safer food preservation



Energy Friendly

From design to production, Create is committed to the application of environmentally friendly refrigerants and new energy-saving materials in products, pursuing hig fficiency and energy conservation, and leading a green lifestyle.




Environmental Friendly

Advocate green technology and commit to the path of sustainable development; Apply the concept of green environmental protection to design,materials, energy eficiency,and engineering.





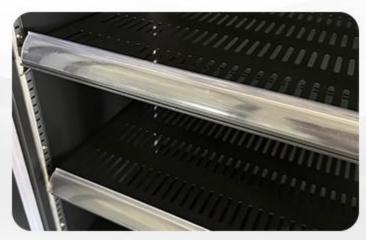



AVAILABLE COLOURS

RAL9005; GN150A; GL180A; GY070A; MW201T; GL205A; RAL9003; RAL9010

ENHANCED
ENERGY EFFICIENCY
VERSATILITY



MAIN PARAMETERS

Light: LED/6500K 24V

Compressor: Secop/Donper Thermostat: Hkreco/Elitech

Refrigeration method: Air cooling

Air cooling: Automatic

Fan: EBM

Refrigerant: R404a/R448a/R290

CUSTOMIZABLE ITEMS

- Standard grid laminate, Optional separable beverage-specific grid layer tray, sheet metal layer plate
- Optional top light box
- Customizable product color, plug and voltage frequency

FEATURES


- · 5-layer tray, large internal space and spacious display area.
- The air speed and air volume in the cabinet are more uniform, and the insulation layer is 50mm, which prevents the loss of cooling capacity, increases the cooling capacity and ensures the comprehensive energy consumption ratio of the product.
- The high-efficiency compressor meets the cooling capacity needs of this product.
- Brand new LED lighting, 6500k white light display, no blind spots in the space, and outstanding product display effect.
- The product is suitable for supermarkets and convenience stores to store beer drinks, fruits and vegetables, cakes, desserts, meat and other refrigerated foods.

PHONE: +86 17661771729

MAIL: create29@createrefrigeration.com

Model Size

LC-0.6	LC-0.6F	680*750*2030
LC-1.2	LC-1.2F	1260*750*2030
LC-1.8	LC-1.8F	1880*750*2030
LC-2.5	LC-2.5F	2500*750*2030

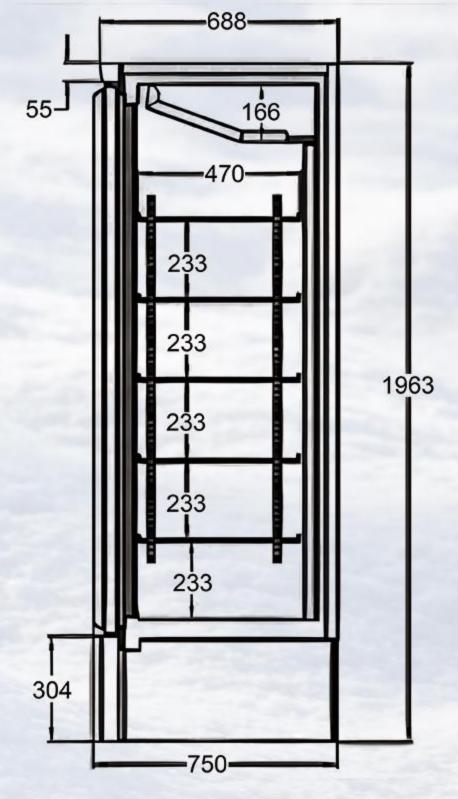

Volume

360L/810L/1260L/1700L

Temperature

0~8°C & -18~-22°C

Voltage/Frequency

220V/50HZ; 110V/60HZ; 220V/60HZ

Additional Information

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

NOTE: We reserve the right to change or revise specifications and product design in connection withany feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.



https://www.createrefrigeration.com/ Xingfu Industrial Park, Binzhou City, Shandong Province, China