

# Remote Glass Door Chiller & Freezer

www.createrefrigeration.com



## Safety

Stable product performance, safer food preservation



## Energy Friendly

From design to production, Create is committed to the application of environmentally friendly refrigerants and new energy-saving materials in products, pursuing high efficiency and energy conservation, and leading a green lifestyle.



## Environmental Friendly

Advocate green technology and commit to the path of sustainable development; Apply the concept of green environmental protection to design, materials, energy efficiency, and engineering.



## AVAILABLE COLOURS

RAL9005; GN150A; GL180A; GY070A;  
MW201T; GL205A; RAL9003; RAL9010

**ENHANCED  
ENERGY EFFICIENCY  
VERSATILITY**



## MAIN PARAMETERS

Light: LED/6500K 24V

Door: Double insulating glass with Low-E coated glass/Three layers of insulating glass with electric heating wire

Outdoor Compressor: Bitzer/Emerson/Copeland/Sanyo/Panasonic

Thermostat: Hkreco/Elitech/Dixell

Refrigeration Method: Air cooling

Defrost Method: Automatic

Fan: EBM

## CUSTOMIZABLE ITEMS

- Door handle styles optional
- Requires an outdoor compressor, optional brands are Bitzer/Emerson/Copeland /Sanyo/Panasonic
- Customizable product color, plug and voltage frequency

## FEATURES

- Large internal space and spacious display area.
- The air speed and air volume in the cabinet are more uniform, and the insulation layer is 50mm, which prevents the loss of cooling capacity, increases the cooling capacity and ensures the comprehensive energy consumption ratio of the product.
- Door has a limit, automatically rebounds, making it convenient to place goods and purchase, prevent excessive dissipation of air conditioning.
- Brand new LED lighting, 6500k white light display, no blind spots in the space, and outstanding product display effect.
- The product is suitable for supermarkets and convenience stores to store beer drinks, fruits and vegetables, cakes, desserts, meat and other refrigerated foods.

## Model

DBL-1.5

DBL-2.2

DBL-3.0

DBL-3.7

## Size

1500\*750/900\*2050/2200

2250\*750/900\*2050/2200

3000\*750/900\*2050/2200

3750\*750/900\*2050/2200

## Volume


1030L/1550L/2060L/2580L

## Temperature

0~8°C/-18~-22°C

## Voltage/Frequency

220V/50HZ; 110V/60HZ; 220V/60HZ

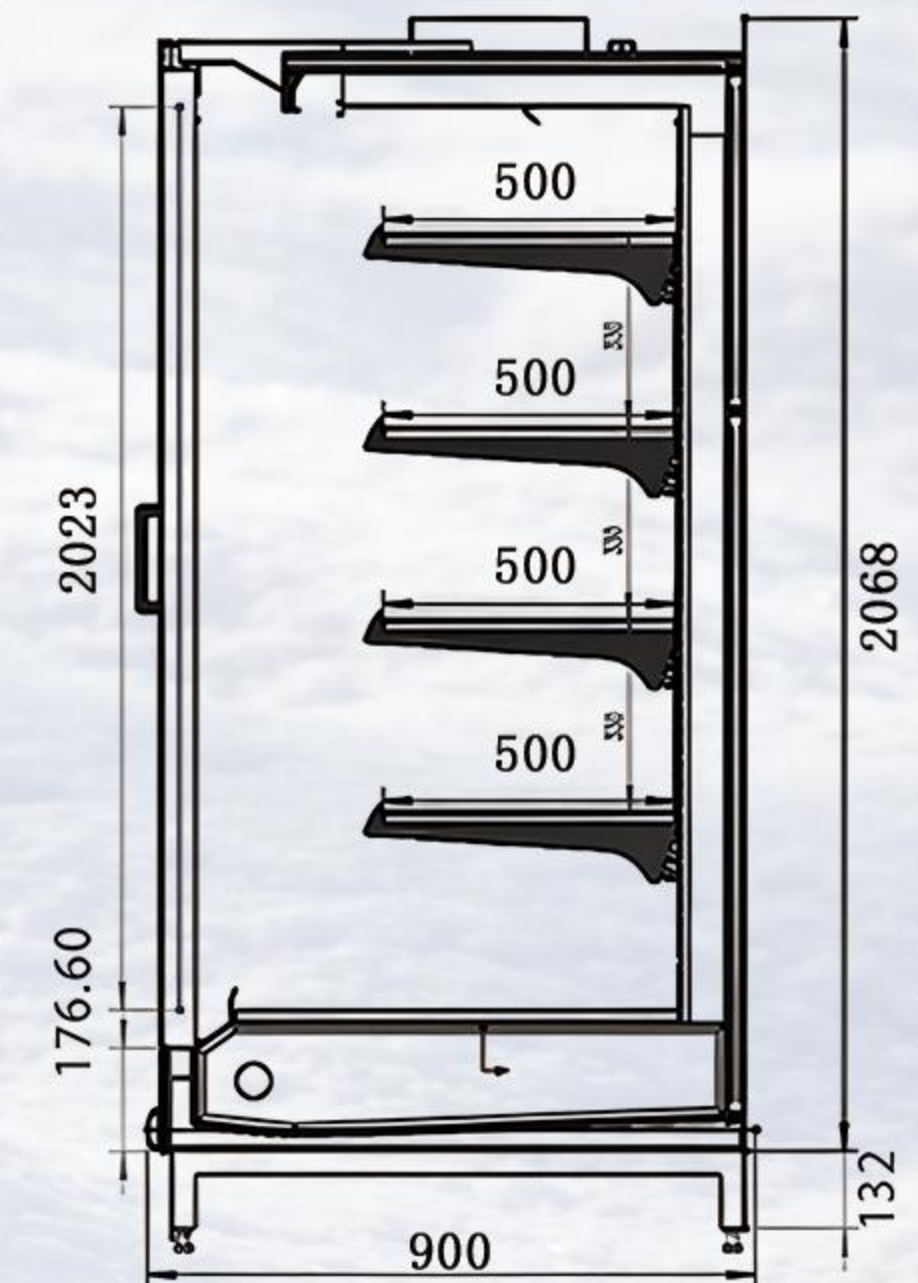

### Additional Information

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

**NOTE:** We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.

PHONE: +86 17661771729

MAIL: create29@createrefrigeration.com



<https://www.createrefrigeration.com/>  
Xingfu Industrial Park, Binzhou City, Shandong Province, China